

Water level control systems

CLV WATER LEVEL CONTROL



PVC | AISI304 | NICKEL-PLATED BRASS | 3 - 4 SENSORS | MADE IN ITALY

- Made of PVC, stainless steel and nickel-plated brass
- Wall mounting
- Available with 3 or 4 sensors
- Custom height according to application
- Sensors adjustable in height

The CLV Water Level Control for fountains consists of a rigid PVC container with 3 or 4 sensors with 5 m of cable mounted on a special sliding track for their adjustment. It allows to guarantee a minimum level of water in the balance tank of the fountain and restore the normal one thanks to the replenishment function.


The insertion of the fourth sensor, in case it is necessary, in addition to replenishment, also allows the pump to be blocked to prevent it from running dry.

Particularly simple to install and manage: simply extract the removable cap from above to which the sliding track with the sensors is attached and adjust their position as needed.


To be used with items CLQ Level Control Unit with 3-4 sensors or GCL Level Control Group with 3-4 sensors.

Height tailored to the application.

DIMENSIONS

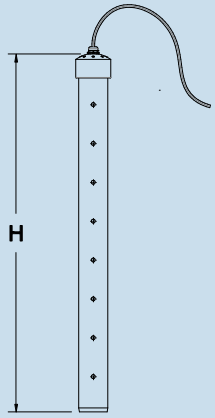

APPLICATION

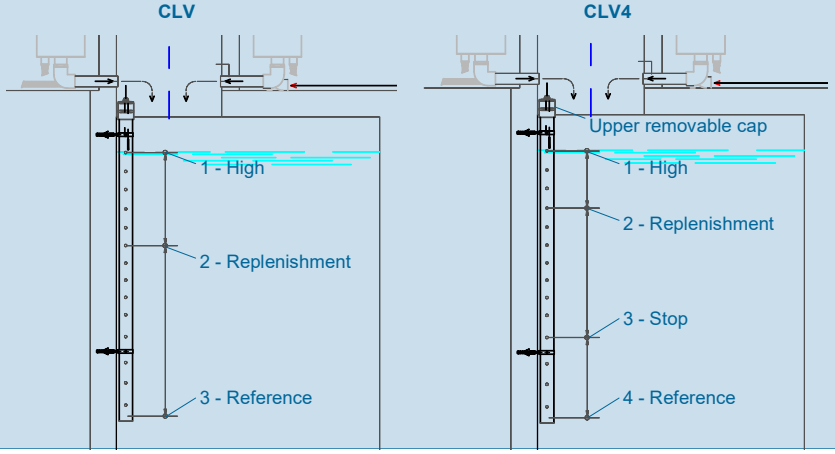

	3-SENSOR CLV	4-SENSOR CLV
CODE	**CLV**	**CLV4**
SENSORS	3	4
H HEIGHT	Custom	
CABLE	3 x 1 mm^2 (H07RN-F)	4 x 1 mm^2 (H07RN-F)
MATERIAL	PVC, AISI304 stainless steel and nickel-plated brass	

3-SENSOR CLV	
SENSORS*	**FUNCTION**
1 (HIGH)	Water level OK - Stop replenishment
2 (REPLENISHMENT)	Start tank replenishment
3 (REFERENCE)	Reference probe

*top-down numbering.
*probes adjustable in height by the sliding track.

4-SENSOR CLV	
SENSORS*	**FUNCTION**
1 (HIGH)	Water level OK - Stop replenishment
2 (REPLENISHMENT)	Start tank replenishment
3 (STOP)	Water level too low, stop of the fountain
4 (REFERENCE)	Reference probe

*top-down numbering.
*probes adjustable in height by the sliding track.

ACCESSORIES	CODE
3-SENSOR WATER LEVEL CONTROL UNIT	**CLQ**
4-SENSOR WATER LEVEL CONTROL UNIT	**CLQ4**
3-SENSOR WATER LEVEL CONTROL GROUP	**GCL**
4-SENSOR WATER LEVEL CONTROL GROUP	**GCL4**