

Classic nozzles

COMETA PLUS INOX

MASSIVE STAINLESS STEEL | AISI316L | 100% METAL | PLASTIC FREE | INFINITE LIFETIME | MADE IN ITALY



- AISI316L massive stainless steel
- Crystalline water jet
- 10 mm up to 15 mm water jet outlet diameter
- Axial regulation flange included
- Independent from the water level

The Cometa Plus Inox fountain nozzle is made of massive AISI316L stainless steel, single-jet, with water level independent operation.

The flange included in the nozzle makes axial jet adjustment easy, quick and durable. Once the orientation is set, the bolt-on flange prevents the nozzle from accidentally shifting. Adjustable up to a maximum of 7 °.

The effect is a crystalline stream.

The wide range of these nozzles completes the Cometa and Cometa Big series with outlet jet diameters ranging from 10 mm to 15 mm.

TIPS FOR USE AND APPLICATIONS


Although classic, the Cometa Plus Inox water jet adapts to the most varied compositions.

Its versatility allows it to be used in vertical or inclined and parabolic orientation, mounted on linear, shaped or ring collectors (see section RINGS AND STAINLESS STEEL MAINFOLDS FOR FOUNTAINS). This allows you to achieve crystal clear water effects with countless geometric variations.


Widely used in Boxes for dry fountains (see DRY FOUNTAINS section).

Underwater lighting: to enrich the water effect with monochrome or RGBW light effects, we recommend the use of the Mizar series submerged LED spotlights for fountains, specific professional products for use in fountains, with an elegantdesign, state-of-the-art technology and extraordinary light effects.

DIMENSIONS

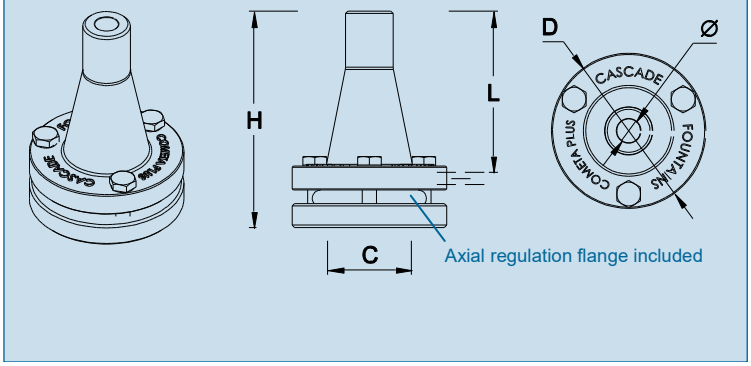

APPLICATION

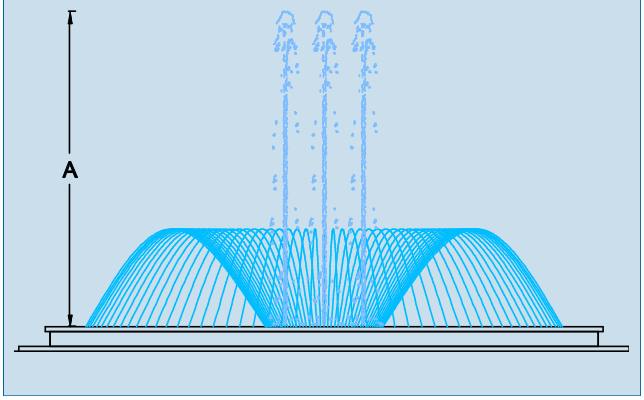

	COMETA PLUS INOX 10	COMETA PLUS INOX 12	COMETA PLUS INOX 14	COMETA PLUS INOX 15
CODE	COX10P	COX12	COX14	COX15
H	90.7 mm	90.7 mm	90.7 mm	90.7 mm
D	65 mm	65 mm	65 mm	65 mm
L	67 mm	67 mm	67 mm	67 mm
Ø	10 mm	12 mm	14 mm	15 mm
C*	1" F	1" F	1" F	1" F
MAX HEIGHT**	6 m	6 m	6 m	6 m
MATERIAL	AISI316L massive stainless steel			
WEIGHT	0.5 kg	0.5 kg	0.5 kg	0.5 kg

*on request, supplied with 1 "M stainless steel adapter complete with flow stabilizer.

**maximum recommended water jet height.

WATER JET HEIGHT A [m]	COX10P		COX12		COX14		COX15	
	FLOW RATE [l/min]	HEAD [mWC]	FLOW RATE [l/min]	HEAD [mWC]	FLOW RATE [l/min]	HEAD [mWC]	FLOW RATE [l/min]	HEAD [mWC]
0.50	15.34	0.60	22.10	0.60	30.00	0.60	37.00	0.60
0.75	18.87	0.90	27.20	0.90	37.00	0.90	45.00	0.90
1.00	21.88	1.20	31.60	1.20	42.90	1.20	51.00	1.20
1.50	27.03	1.81	39.00	1.81	53.00	1.81	59.00	1.81
2.00	31.47	2.42	45.40	2.42	61.70	2.42	73.00	2.42
2.50	35.48	3.03	51.20	3.03	69.60	3.03	82.00	3.03
3.00	39.19	3.64	56.46	3.64	77.00	3.64	88.00	3.64
4.00	45.98	4.88	66.25	4.88	90.00	4.88	105.00	4.88
5.00	52.21	6.12	75.22	6.12	102.35	6.12	115.00	6.12
6.00	58.06	7.37	83.65	7.37	114.00	7.37	126.00	7.37