


Hydraulic accessories for fountains

FOUNTAIN INLET NOZZLES

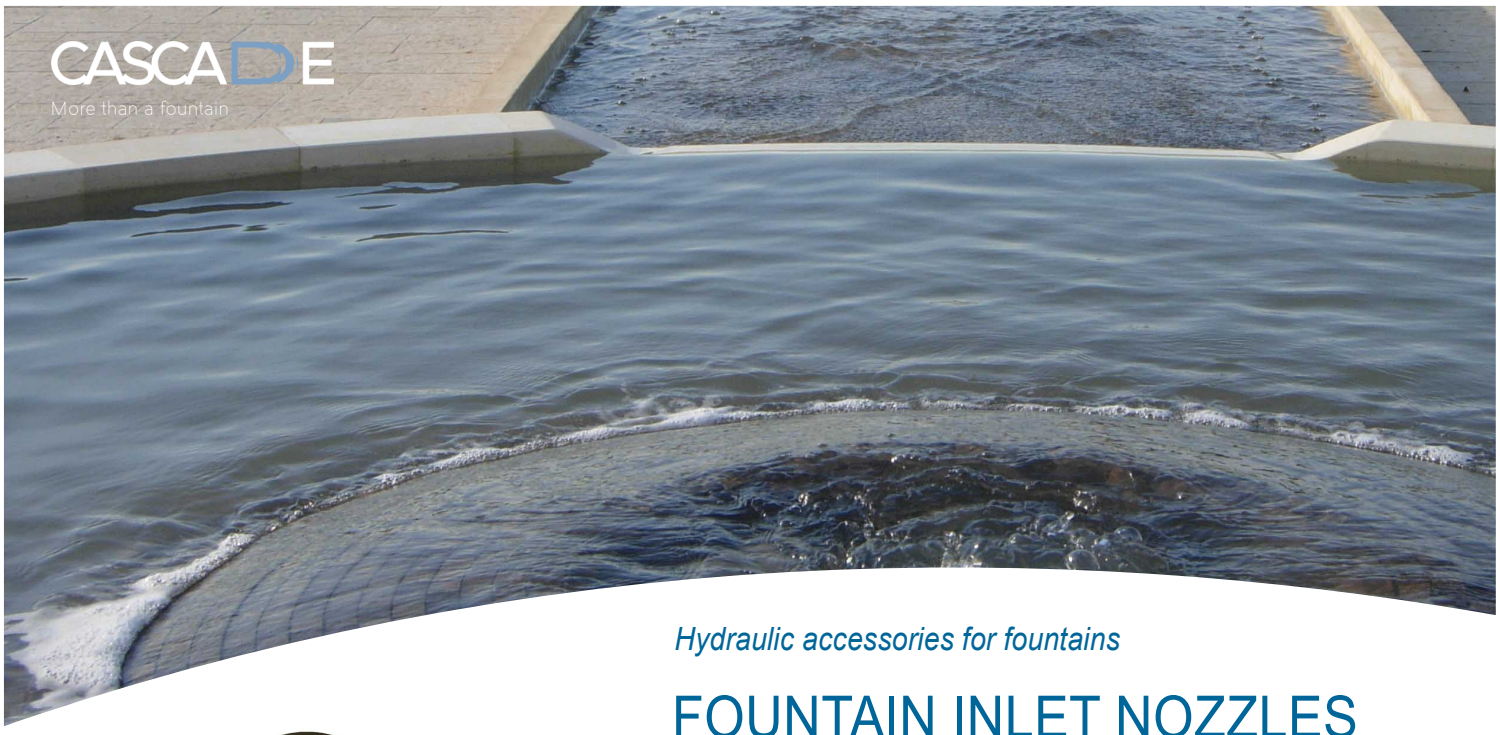

AISI304 / ABS | AISI304 | AISI316 | BRASS | ABS | WALL MOUNT | FLOOR MOUNT | MADE IN ITALY

- Floor inlet nozzle in AISI 304 stainless steel and white ABS
- Wall inlet nozzles in stainless steel / brass / ABS as alternatives
- Ideal for water recirculation inside fountains
- Very small dimensions

The fountain inlet nozzle, made of brass, AISI304 stainless steel (AISI316 on request) or white nylon, is suitable for the water recirculation inside the fountain for small filtering systems. The available small dimensions of 1" and 1 ¼", smaller than the commercial standards, provide anyway relevant recirculation water flow rates, but in tiny spaces. This allows to use a higher number of inlet nozzles also in small basins, providing a better distribution of the water injected inside the tank.


The brass and stainless steel versions are particularly suitable for fountains made of fine construction materials, in which the aesthetics is also important, because they are more easily inserted in the context thanks to the value provided by brass and stainless steel, besides the small dimensions.

To be used preferably together with Floor Drainer and Fountain Skimmer.

The metal versions are available for wall or floor mounting.

DIMENSIONS

IMP100 - IMP125 - IMP150

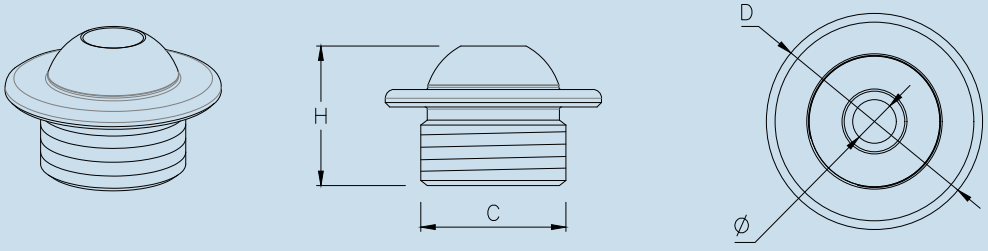


CASCADE | via Salento 16 - Zona Industriale - 73020 Melpignano (LE) - ITALY | (+39)0836331576 - (+39)0836331775 | www.cascade.it | info.cascade@cascade.it

	WALL INLET NOZZLES		
CODE	**IMP100**	**IMP125**	**IMP150**
Ø	10 mm	15 mm	18 mm
D	49,5 mm	60 mm	68 mm
H	32 mm	35 mm	35 mm
C	1 " M	1 1/4 " M	1 1/2 " M
MAX FLOW RATE	50 l/min	75 l/min	110 l/min
MATERIAL	Brass	Brass	Brass

DIMENSIONS

IMF150

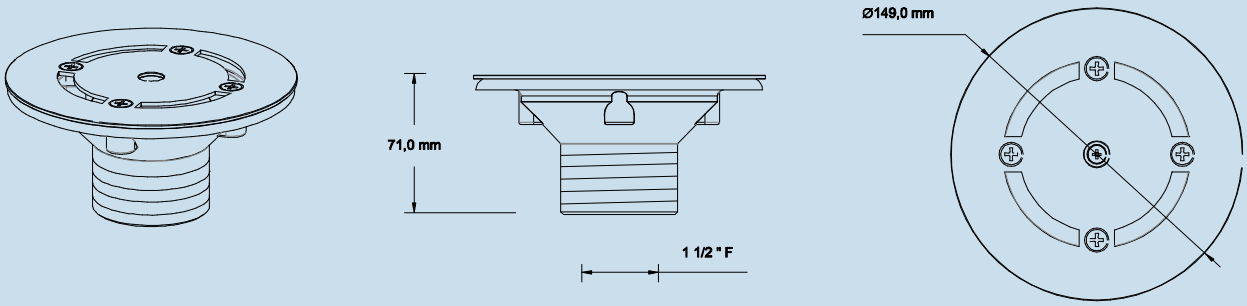

	FLOOR INLET NOZZLE
CODE	**IMF150**
MAX FLOW RATE	110 l/min
MATERIAL	Acciaio inox AISI304 (AISI316) e ABS bianco