

Classic nozzles

SPUMEGGIANTE



100% METAL | PLASTIC FREE | INFINITE LIFETIME | MADE IN ITALY

- Made of stainless steel and brass
- Foamy and compact water jet
- From 20 mm up to 75 mm outlet diameters
- Independent from the water level

The Spumeggiante is a fountain nozzle made of stainless steel and brass and it is independent from the water level.

The produced effect is a foamy and compact water jet, obtained thanks to a high air-water mix.

The Spumeggiante 20 (ø 20 mm), the smallest version of this nozzle in the market, completes the range which reaches even 75 mm of output diameter.

TIPS FOR USE AND APPLICATIONS

The Spumeggiante nozzle adapts to any kind of fountain and water scene, thanks to its foamy, hefty and visible water jet.

Thanks to its excellent working regularity and to the water jet density, this nozzle guarantees a good functioning both with smaller and bigger heights, with bigger models.

In its smallest version, the Spumeggiante 20 is suitable also for parabolic water effects.


Widely used inside the Boxes for dry fountains.

Ideal for any kind of basin (see the PREASSEMBLED FOUNTAINS WITH TANK section).


We suggest the use of the axial regulation flange.

Underwater lighting: to enhance the water effect with monochrome or RGBW lighting features we recommend the use of the Mizar underwater LED fountain lights, professional products specific for fountain illumination, of refined design, cutting-edge technology and amazing lighting outcomes.

DIMENSIONS

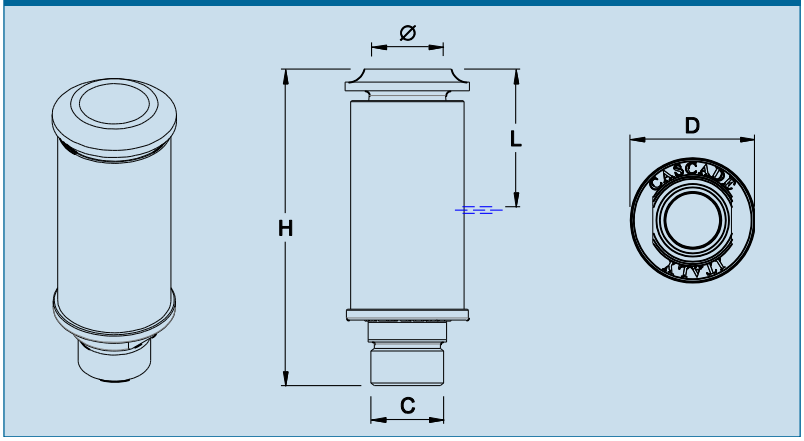

APPLICATION

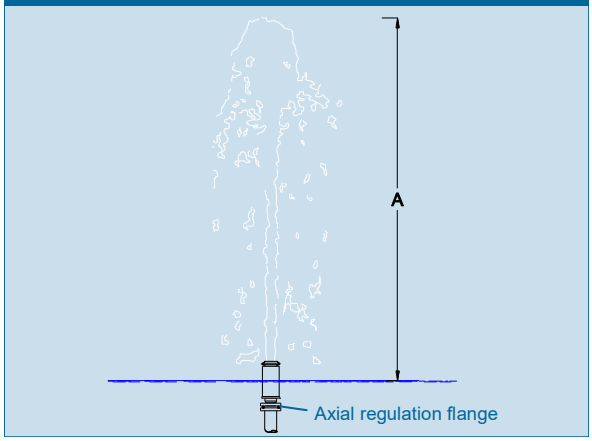

	SPUMEGGIANTE 20	SPUMEGGIANTE 32	SPUMEGGIANTE 50	SPUMEGGIANTE 75
CODE	SP20	SP32	SP50	SP75
H	96 mm	145 mm	215 mm	260 mm
D	33.7 mm	52 mm	76.1 mm	109.5 mm
L	40 mm	60 mm	100 mm	130 mm
Ø	20 mm	32 mm	50 mm	72 mm
C	1/2 " M	1 " M	1 ½ " M	2 " M
MAXIMUM HEIGHT*	3 m	3 m	5 m	6 m
MATERIAL	Stainless steel and brass	Stainless steel and	Stainless steel and brass	Stainless steel and brass
WEIGHT	0.3 kg	0.92 kg	2.9 kg	4.3 kg

*maximum recommended water jet height.

WATER JET HEIGHT A [m]	SP20		SP32		SP50		SP75	
	FLOW RATE [l/min]	HEAD [mWC]	FLOW RATE [l/min]	HEAD [mWC]	FLOW RATE [l/min]	HEAD [mWC]	FLOW RATE [l/min]	HEAD [mWC]
0.50	15	1.4	45	1.5	96	2.8	220	0.9
0.75	18	2.0	59	2.2	119	3.5	270	1.3
1.00	25	2.5	70	2.9	137	4.2	315	1.8
1.50	30	3.2	92	4.4	169	6.1	385	2.6
2.00	34	4.0	105	5.8	199	7.5	448	3.5
2.50	42	4.7	127	7.2	221	8.4	503	4.4
3.00	50	5.2	152	8.3	242	9.5	553	5.3
3.50					264	11.2	604	6.5
4.00					283	13.2	645	7.1
4.50					294	15.3	685	8.0
5.00					320	17.8	728	8.9
6.00							805	10.7

ACCESSORIES	CODE
AXIAL REGULATION FLANGE	FL50 - FL100 - FL150 - FL200