

Electrical accessories for fountains

UNDERWATER FEED-THROUGHS



AISI304 / Brass | PVC / Brass | IP68 | MADE IN ITALY

- In AISI 304 stainless steel - nickel-plated brass - PVC
- Available in single and multiple versions
- More outlets available on request
- Small dimansions
- IP68 - leakproof - for permanent immersion

The IP68 underwater feed-throughs are designed for the underwater cables passage through tank walls or bottom and are IP68, leakproof and suitable for permanent immersion.


The single versions are available both in stainless steel, including the nickel-plated brass cable gland, stainless steel anchorage and the ø 25 mm PVC sheath gland, and in PVC, including the nickel-plated brass cable gland on gluing cap ø 32 mm. Spare rubber seal ø 11 mm included in both versions.

The multiple versions, made of brass and PVC, are complete with nickel-plated brass cable glands and suitable for cables from 5 mm to 14 mm. 2 to 6 outputs available. More outlets upon request.


	SINGLE IP68 FEED-THROUGH		MULTIPLE IP68 FEED-THROUGH			
CODE	PASINOX	PASPVC	PAS2	PAS3	PAS4	PAS5
NO. OF OUTLETS	1	1	2	3	4	5
Ø SHEATH GLAND	25 mm	-	-	-	-	-
Ø CAP	-	32 mm	-	-	-	-
Ø SEAL	14 mm	14 mm	From 8 mm up to 14	From 8 mm up to 14 mm	From 8 mm up to 14 mm	From 8 mm up to 14 mm
Ø CONNECTION	-	-	63 mm	63 mm	63 mm	63 mm
MATERIAL	SS / Nickel-plated brass	PVC / Nickel-plated	PVC / Nickel-plated	PVC / Nickel-plated brass	PVC / Nickel-plated brass	PVC / Nickel-plated brass

DIMENSIONS


PASINOX

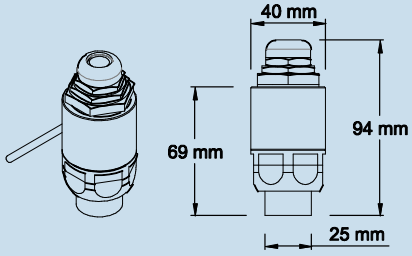

PASPVC



APPLICATION

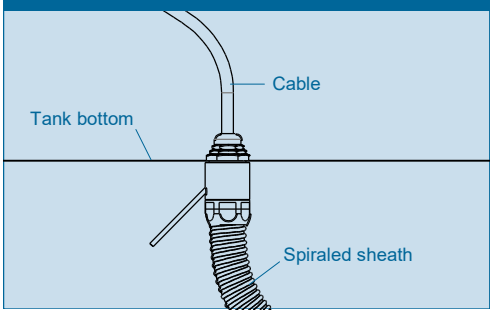

CASCADE | via Salento 16 - Zona Industriale - 73020 Melpignano (LE) - ITALY | (+39)0836331576 - (+39)0836331775 | www.cascade.it | info.cascade@cascade.it